

PS-1500 RJS

REACTIVE RESIN JOINT SAND SYSTEM

IDEAL FOR WALKWAYS,
PATIOS & RESIDENTIAL DRIVEWAYS¹

STRONG STABILIZED SAND JOINTS

- Prevents Sand Washout
- Resists Weed Growth
- Decreases Insect Activity
- Frost Resistant
- Permeable

NEW INDUSTRY STANDARD

- Stronger & More Durable
- For Joints $\frac{1}{8}$ " - $1\frac{1}{4}$ "
- Suitable For Driveways With Light Duty Vehicular Use

READY-TO-USE

- Convenient One-Part Resin Sand
- No Mixing Or Blending

HAZE & DUST FREE

- Resin Coated Sand Installs With Water
- Produces Solid Sand Joints Without Hazing

INSTALL RAIN OR SHINE

- Minimize Rain Affecting Your Schedule
- Installs On Wet Surface

¹For residential driveways with light duty vehicular use only.

PS-1500 RJS


Formulated for Joints $\frac{1}{8}$ " to $1\frac{1}{4}$ "

Concrete & Clay Pavers
Natural & Cast Stone • Porcelain Tile

COVERAGE	
Joint Size	Area in SQ Feet
Up to $\frac{1}{4}$ "	50 - 60
$\frac{1}{4}$ " - $\frac{1}{2}$ "	30 - 50
$\frac{1}{2}$ " - $\frac{3}{4}$ "	15 - 30
$\frac{3}{4}$ " - $1\frac{1}{4}$ "	10 - 15

Coverage will vary depending on shape, size & depth of pavers installed.
Minimum joint depth required for PS-1500 is $\frac{3}{4}$ ".

AVAILABLE COLORS:

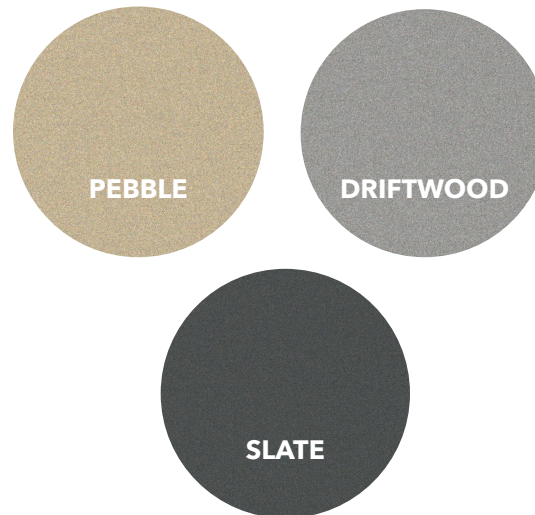

Color swatches are a representation of the available colors.
Actual sand color may vary.

SEK SUREBOND
HARDSCAPES *Done Right!*

800-932-3343

info@sek.us.com | www.sek.us.com

PS1500 2270



PS-1500 RJS

REACTIVE RESIN JOINT SAND SYSTEM

- New Industry Standard: Stronger & More Durable
- Ready-to-Use & Easy to Install
- Resists Weed Growth & Insect Infestation
- Frost & Water Resistant
- Permeable



POLYSWEEP

RESIN
JUST DAMN GOOD [^]SAND™

RESIN JUST DAMN GOOD ^ SAND™

From the makers of PolySweep Polymeric Sand, **PS-1500 Reactive Resin Joint Sand System** offers a superior strength and durable ready-to-use solution for stabilized sand joints that can be installed rain or shine.

PS-1500 is made with a new generation synthetic resin that hardens when it reacts with the air. It can be used in new or existing installations to create beautiful yet extremely durable hardened sand joints that will withstand the rigors of residential vehicular traffic and harsh freeze/thaw conditions.

READY-TO-USE

PS-1500 is packaged in a 55 lb pail with oxygen removed and nitrogen added. No mixing or blending required.

IDEAL FOR RESIDENTIAL & LIGHT COMMERCIAL APPLICATIONS

PS-1500 can be used on residential and light commercial applications with a traditional or open graded base or on concrete overlays. All surfaces must have stable, free-draining bedding and base material. Ideal for walkways, patios and residential driveways with light duty vehicular use. Do not use on surfaces where de-icing products are used or on pool decks with chlorinated or salt stabilized pools.

STRONGER & MORE DURABLE

PS-1500 creates strong stabilized sand joints that will help lessen the amount of weed growth, insect infestation and sand loss. Once cured, PS-1500's compressive strength is remarkable at 2200 psi.

INSTALL RAIN OR SHINE

PS-1500 installs on a wet surface, which means rain has less impact on your schedule. Postpone installation in heavy rain or prolonged rainy conditions. Installation temperatures should be in the range of 40°F - 90°F with no overnight frost expected.

FROST RESISTANT & PERMEABLE

PS-1500 stabilized sand joints are permeable when properly maintained and withstand freeze/thaw conditions.

MADE WITH CLEAN SWEEP TECHNOLOGY

PS-1500 installs on a wet surface. When installation instructions are followed, PS-1500 is:

- DUST FREE
- HAZE FREE
- STAIN FREE

